


Switching Power Supply

80 Watt / Single Output

Key Features:

- 80 Watts output Power
- 12 / 24 VDC Single Output Models
- Convection Cooled Operation
- Open Frame Package measuring only 3 x 5 x 1.08"
- High Density
- >90% Efficiency
- High Reliability in excess of 220,000 Hours
- 1 + 1 Redundant Operation with Integrated OR'ng Diodes
- International Safety Approvals
- Class B Emissions
- 3 Year Warranty

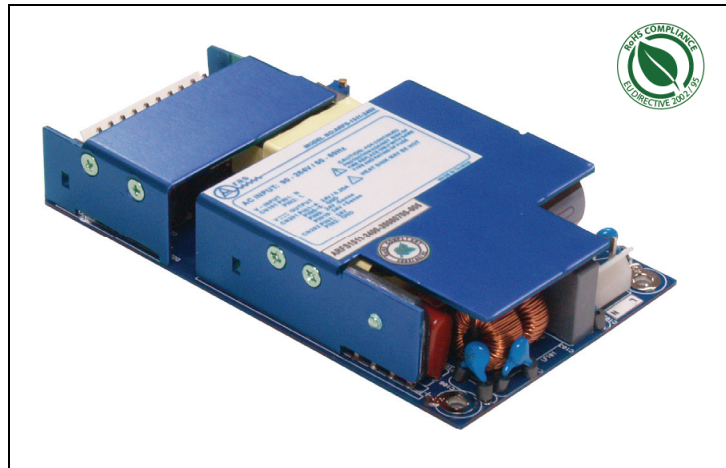

Design Standards:



The ARFS-0811 series of AC/DC Power Supplies are intended for general use in ITE Applications. Designed with Universal Input and qualified to meet International Safety Approval and Emission Standards, these supplies can be utilized in a wide array of applications around the globe.

The high efficiency operation of these supplies allow for full-load convection-cooled operation, substantially reducing system costs.

Input:

(TA = +25C Unless otherwise specified)

Characteristic	Min	Typ	Max.	Units	Note
Input Voltage	90	-	264	VAC	
Input Frequency	47	-	63	Hz	
Inrush Current	-	-	30 50	A A	115 VAC Operation 230 VAC operation
Input Current	-	-	1.25	A	90 VAC Operation
Input Protection	-	-	5.00 250	A VAC	Single Fused Input Protection
Leakage Current	-	-	300	μA	264 VAC
Turn-On Voltage	85	-	-	VAC	
Turn-Off Voltage	-	-	80	VAC	
Lightning Surge / Transients	-	-	±2k ±1k	VAC VAC	Line-Earth (EN61000-4-5) Line-Line (EN61000-4-5)
Voltage Dips	-	-	95 30	% %	10ms (per EN61000-4-10) 500ms (per EN61000-4-10)
Fluctuations / Flicker	-	-	-	-	Per EN61000-3-3
Voltage Interruptions	-	-	-	-	Per EN61000-4-11
Harmonics	0.95	-	-	pf	Per EN6100-3-2 Class D
Hold-Up Time	16	-	-	ms	90~264 VAC / Full Load (See figure 1)

Output:

(TA = +25C Unless otherwise specified)

Characteristic	Min	Typ	Max.	Units	Note
Voltage Setpoint:					
ARFS-0811-1200	11.40	12.00	12.60	VDC	
ARFS-0811-2400	23.76	24.00	24.24	VDC	
Output Current:					
ARFS-0811-1200	0.5	-	6.67	Amps	
ARFS-0811-2400	0.5	-	3.33	Amps	
Adjustment Range:					
ARFS-0811-1200	11.40	-	12.60	VDC	
ARFS-0811-2400	22.80	-	25.20	VDC	
Ripple / Noise			1	%	Pk-pk max, 20MHz, measured at output connectors
Regulation	-	-	1	%	Max Line, Load & Temp
Dynamic Load:					
Deviation			5	%	20% Step Load
Recovery			10	ms	
Output Rise Time			10	ms	10~90% of Rated VDC, Full Load (See figure 1)
Turn-On Delay			10	ms	(See figure 1)
Over-Voltage Protection	1		150	%	of Rated Voltage, Latching (Recycle input to reset)
Over-Current Protection	115		140	%	Total Power limited (Auto-Recovery)
Short Circuit Protection	-	-	-		Continuous (auto-recovery). An output short circuit is defined as any load impedance of less than 0.1 ohms
Current Share Accuracy	-20		+20	%	Droop Method. If a power supply fails the output voltage dip should be less than 100mV.
Redundant Operation					All power supplies have an O-Ring diode to prevent one power supply failure from bringing down the system
Remote Sense			250	mV	



General:

Characteristic	Min	Typ	Max.	Units	Note
Temperature Operating	0		+70	°C	Derate 2.5% per °C above 50°C
Storage	-40		+85	°C	
Humidity Operating	0		95	%	Non-Condensing Non-Condensing
Storage	0		95	%	
Shock Operating	10			G	11msec, half-sine wave pulse, in both directions, on three mutually perpendicular axes
Storage	40			G	
Vibration	0.25			G	10-250hz, 1 octave/min, 15 min dwell, 3 axes
Efficiency		90%			
Temperature Coefficient					
Reliability	200			kHrs	MIL-HBK-217D (Full Load, 110V AC Input; Ground Benign; 25°C ambient)
Isolation (Hi-Pot)	1500			VAC	Primary to ground: 1500Vac/50Hz, 3 sec, Cut-off current:10mA

Electromagnetic Compatibility:


Characteristic	Description
Line Conducted EMI	FCC Class B / EN55022 Class B under all rated input and load conditions
Electrostatic Discharge	EN61000-4-2: Contact Discharge- Contact discharge in 2kV increments to 6kV for metallic surfaces including connector bodies. 10 discharges pretest point at each voltage: 5 positive polarity and 5 negative polarity. Air discharge – Air discharge in 2kV increments to 8kV for scams and non-metallic user accessible surfaces. 10 discharges pretest point at each voltage: 5 positive polarity and 5 negative polarity.
Radiated Susceptibility EFT / Bursts	EN61000-4-3: Electromagnetic Field Strength 3V/m EN61000-4-4: Direct Coupling Line to Ground Reference Plane: 1kV increments up to 2kV for a minimum of 1 min. at each voltage. Direct Coupling Neutral to Ground Reference Plane: 1kV increments up to 2kV for a minimum of 1 min. at each voltage. Direct Coupling Ground to Ground Reference Plane: 1kV increments up to 2kV for a minimum of 1 min. at each voltage
Surges	EN61000-4-5: The peak value of the bi-directional surge waveform shall be 2kV for common mode and 1kV for differential modes of transient surge injection. No unsafe operation or no user noticeable degradation is allowed under any condition.
Conducted Immunity	EN61000-4-6: 0.15~800MHz, 10V, 80% AM
Voltage Dips	EN61000-4-10: 95% Dip & 10ms, 30% Dip & 500mS
Voltage Interruptions	EN61000-4-11, 95% reduction, 5s
Fluctuations & Flicker	EN61000-3-3
Harmonic Distortion	EN61000-3-2 Class D

Safety Standards:


UL/cUL 60950-1, (pending)
 TUV EN60950-1, (pending)
 CB Report IEC60950-1, (pending)
 CE Mark (Low Voltage Directive) (pending)



Turn-On / Turn Off Characteristics:

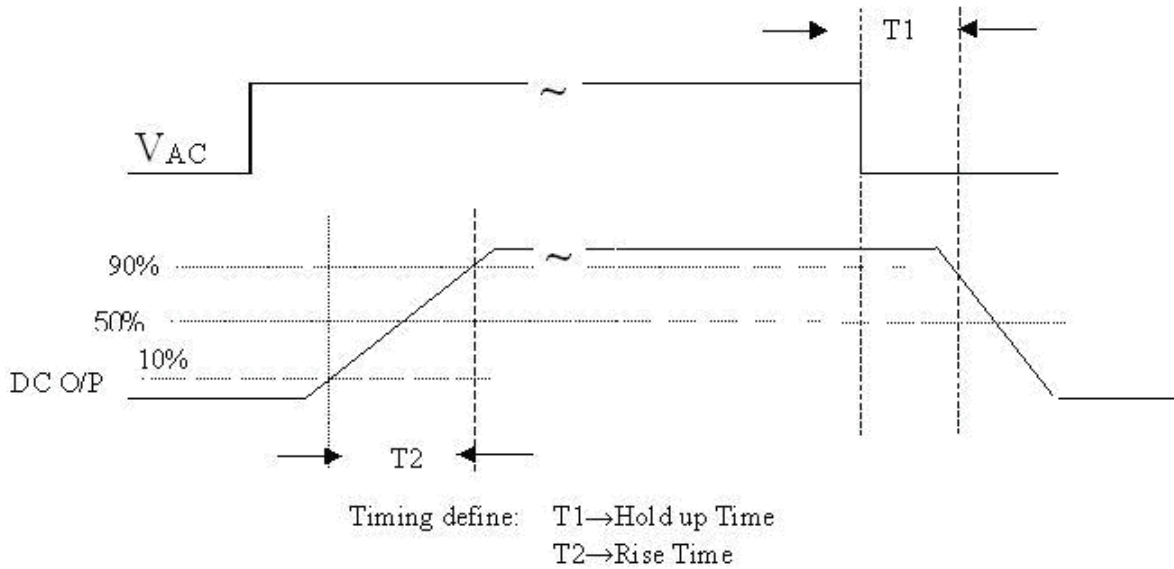

Outline Drawing:

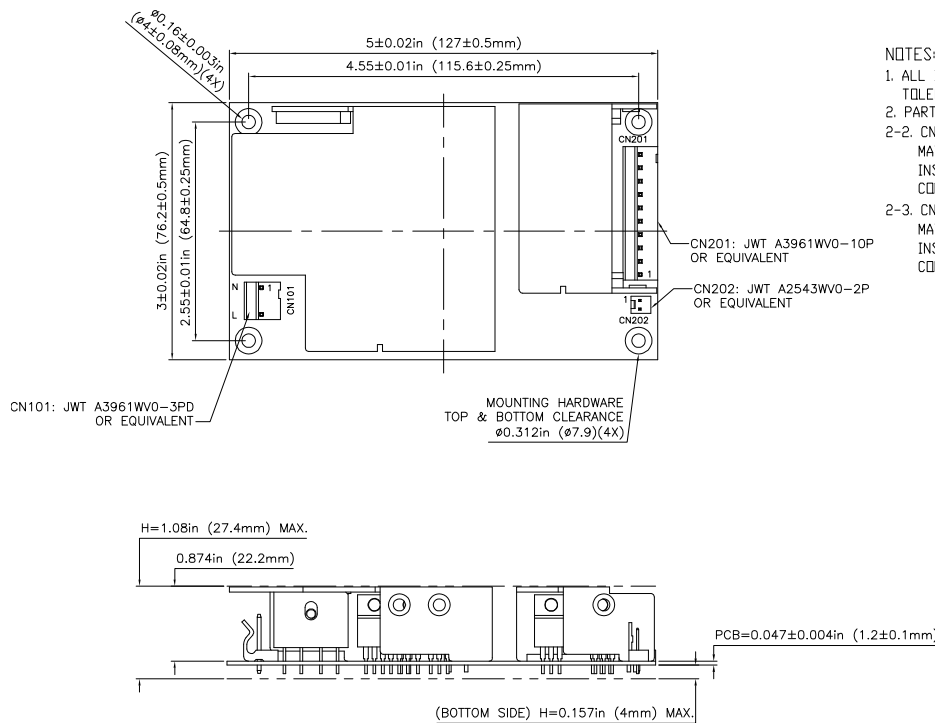

NOTES: UNLESS OTHERWISE SPECIFIED.

1. ALL DIMENSION ARE IN mm. TOLERANCES TO BE ± 0.5 mm
2. PARTS SPECIFIED AS FOLLOWS:
2-2. CN101, CN201 SOCKET:
MATERIAL:
INSULATOR: NYLON 66 UL 94V-0
CONTACT: 1.14mm SQUARE PIN, BRASS, TIN PLATED
2-3. CN202 SOCKET:
MATERIAL:
INSULATOR: NYLON 66 UL 94V-0
CONTACT: 0.64mm SQUARE PIN, BRASS, TIN PLATED

CN101	
PIN1	AC Neutral
PIN2	AC Line

CN201	
PIN1~4	24V/6.25A
PIN5~8	GND
PIN9	24V -Sense
PIN10	24V +Sense

CN202	
PIN1	24V
PIN2	GND