

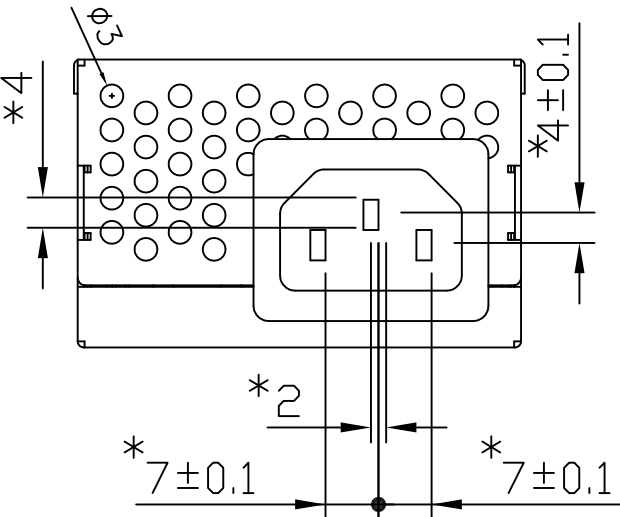
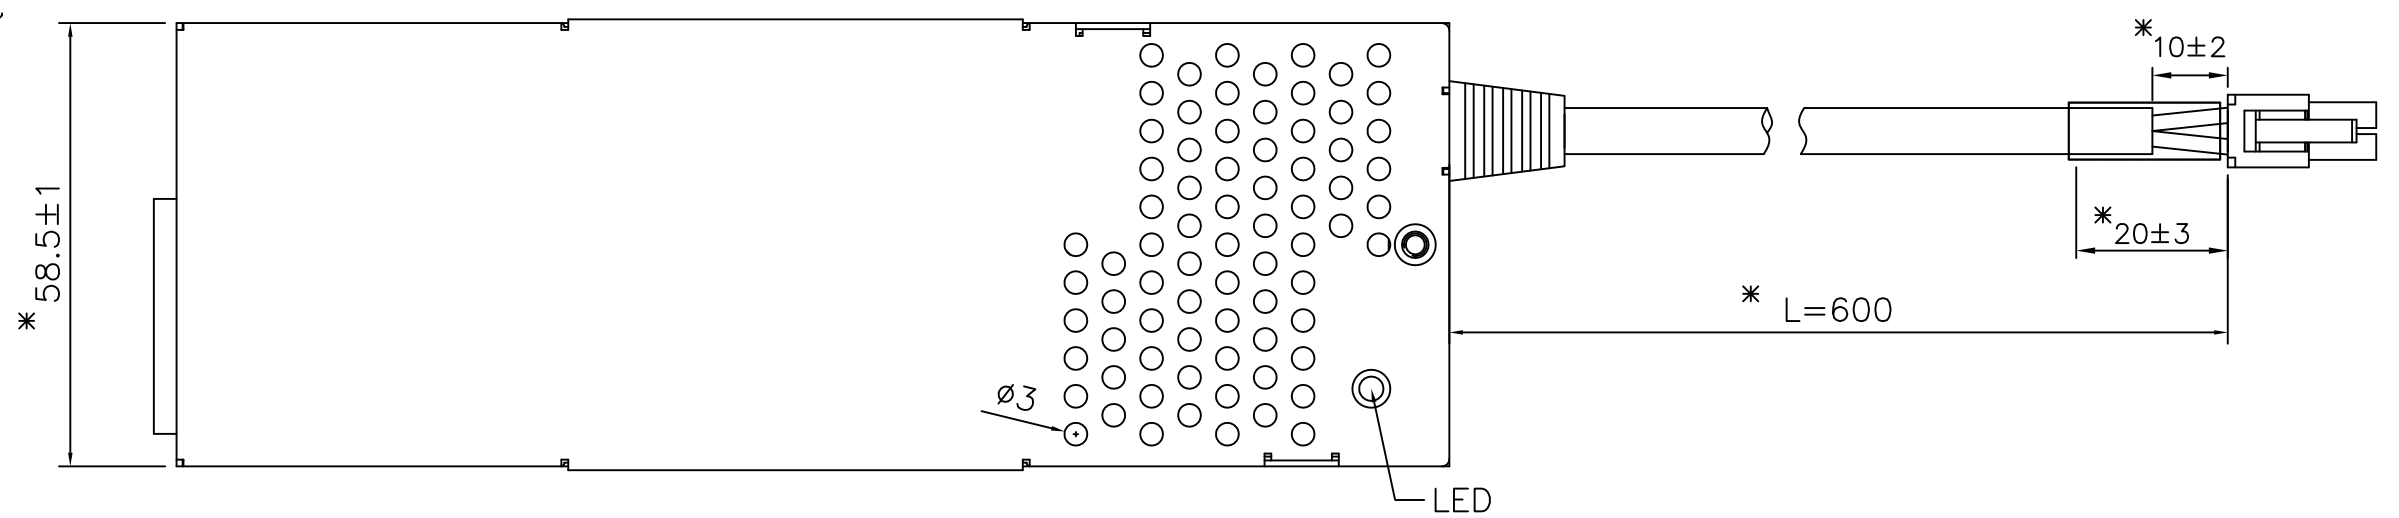



- NOTES: UNLESS OTHERWISE SPECIFIED.
- ALL DIMENSIONS ARE IN MM.
TOLERANCES TO BE ± 0.5 MM.
 - PARTS SPECIFIED AS FOLLOWS:
 - ENCLOSURE:
 - MATERIAL: SECC, T=0.8mm
 - AC INPUT:
 - INLET: IEC 320, C14 CERTIFIED, 3 WAY, COLOR: BLACK.
 - DC OUTPUT:
 - CONNECTOR:
 - MATERIAL: COLOR: NATURAL
 - INSULATOR: NYLON 66 UL 94V-0
 - CONTACT: BRASS, TIN PLATED
 - PLUG POLARITY: SAME AS DRAWING
 - PVC WIRE: UL/ CSA, AWM 2464, VW-1, 80°C, 16AW, COLOR: BLACK
 - INSERTION & WITHDRAWAL STRENGTH:
 - AC CABLE WITH AC INLET SHALL BE 3.0 Kgf ~ 5.5 Kgf.
 - ADAPTOR UNIT:
 - DIMENSIONS MARKED * MARK MUST BE INSPECTED & CONTROLLED STRICTLY

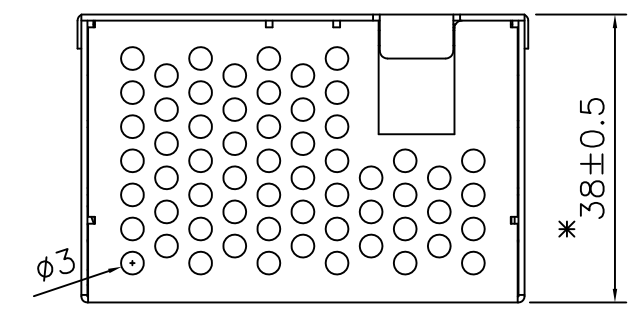

LEFT-SIDE VIEW

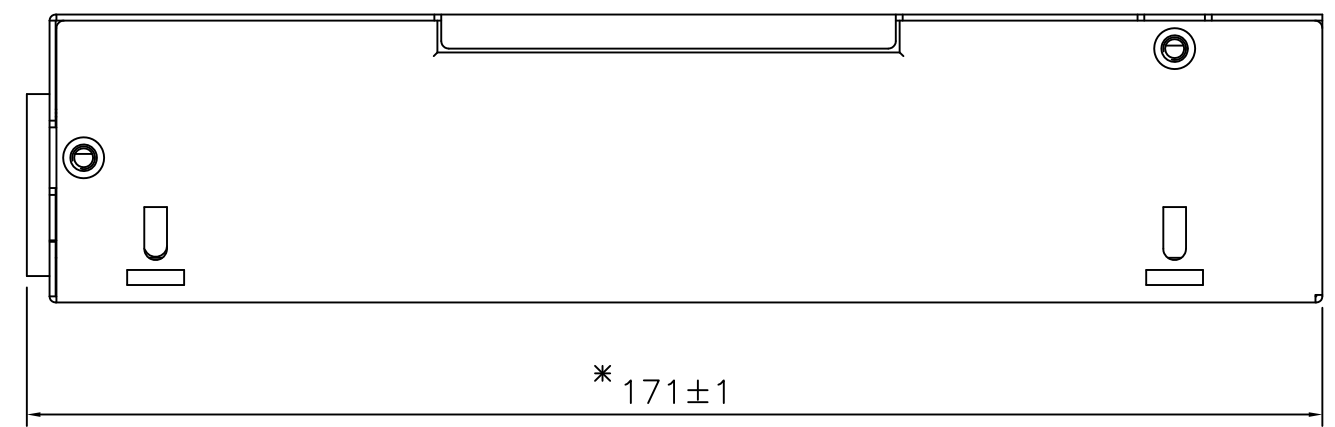

RIGHT-SIDE VIEW

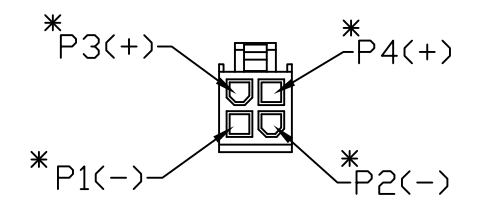

OUTPUT CONNECTOR ASS'Y				
PIN #	1	2	3	4
FUNCTION	GND	GND	18V	18V
WIRE COLOR	BLACK	BLACK	WHITE	WHITE

Aras
Aras Power Technologies Taiwan Branch
美商汎瑞斯電子科技(股)公司台灣分公司

THIRD ANGLE PROJECTION
UNITS: mm SCALE: A3 SIZE

Designed	KUSH KAO	DESCRIPTION:	PART NO.:	MODEL NO.:
Drawn	KUSH KAO	OUTLINE		ARP-1511-00
Approved:		Material:	SHEET 1 OF 1	3D FILE
DATE	Apr-03-2008	Treatment:	DWG NO. ARP1511-OD-01	REV. C.0

REV.	DESCRIPTION	DATE	APP
A.0	REMOVE THE FAN	4/03'08	KUSH KAO
B.0	AC INLET CHANGED FROM C6 TYPE TO C14 TYPE	3/07'08	KUSH KAO